


NOTE 1. SPEAR PICKET TOP (IE-1)




OPTION: FLEUR DE LIS (IE-2)






NOTE 2. 89mm DIA. (3 1/2") CAST ALUM. RING



OPTION: 89mm DIA. (3 1/2") CAST ALUM. DIAMOND



GATE TOP OPTIONS



SPECIFICATIONS:


- POSTS RAILS:** NORTH AMERICAN PRODUCED EXTRUDED PRIME MARINE ALUMINUM 6061-T6
- FINISH:** SEVEN STAGE ARCHITECTURALLY CERTIFIED PRETREATMENT AS PER AAMA 2604. SUPER DURABLE ELECTROSTATICALLY APPLIED POWDER COAT - MIN THICKNESS 2.5 MILS
- POSTS:** 51mm x 51mm (2"x2"), .125WALL STANDARD (.188 WALL AVAILABLE)
- POST CAPS:** PYRAMID, BALL, SPIRE OR ACORN
- RAILS:** 25mm x 25mm (1" x 1"), .125WALL (top and bottom) .180WALL (sidewall)
- UPRIGHTS:** 25mm x 25mm (1" x 1") .065WALL
- PICKETS:** 16mm x 16mm (5/8" x 5/8"), .080 WALL CAST SPEAR (IE-1) OR FLEUR DE LIS (IE-2) TOPS (USE IE-1 UNLESS OTHERWISE NOTED)
- INFILL:** 89mm DIA. CAST ALUMINUM RING OR DIAMOND (USE RINGS UNLESS OTHERWISE NOTED)
- WELDS:** ALUMINUM - FULL TACK BOTH SIDES OF PICKET
- COLOUR:** STANDARD COLOURS ARE BLACK, SEMI-BLACK, BROWN, GREEN WHITE & FOREST GREEN CUSTOM COLOURS AVAILABLE UPON REQUEST

AVAILABLE GATE HEIGHTS:


- 762mm (30")
 - 914mm (36")
 - 1067mm (42")
 - 1219mm (48")
 - 1524mm (60")
 - 1829mm (72")
- SHOWN

FITTINGS


POST COLLAR c/w 1/2"x3" HINGE BOLT





GATE FINGER 1" x 1"




SECTION B-B




SECTION A-A

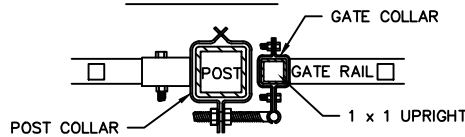


GATE COLLAR 1" x 1"



GATE LATCH 1" x 1"



CANE BOLT



SELF CLOSER OPTIONAL

COMMENTS: DOUBLE SWING GATE



TITLE

**IRON EAGLE I ALUMINUM SERIES
STYLE 2190 DOUBLE SWING GATE**

DRAWING No.

A2190-DG

CHK'D

DATE: JAN 12, 2018