

SPECIFICATIONS:

POSTS RAILS: NORTH AMERICAN PRODUCED EXTRUDED
PICKETS PRIME MARINE ALUMINUM 6061-T6

FINISH: SEVEN STAGE ARCHITECTURALLY CERTIFIED
 PRETREATMENT AS PER AAMA 2604.
 SUPER DURABLE ELECTROSTATICALLY APPLIED
 POWDER COAT - MIN THICKNESS 2.5 MILS

POSTS: 51mm x 51mm (2"x2"), .125WALL STANDARD
 (.188 WALL AVAILABLE)

POST CAPS: PYRAMID, BALL, SPIRE OR ACORN

RAILS: 25mm x 25mm (1" x 1"),
 .125WALL (top and bottom)
 .180WALL (sidewall)

UPRIGHTS: 25mm x 25mm (1" x 1") .065WALL

PICKETS: 16mm x 16mm (5/8" x 5/8"), .080 WALL
 FLAT TOP c/w UV INSERT, PINCHED ARROW,
 MAPLE LEAF OR FLEUR DE LIS
 (FLAT TOP UNLESS OTHERWISE NOTED)

WELDS: ALUMINUM - FULL TACK BOTH SIDES OF PICKET


COLOUR: STANDARD COLOURS ARE BLACK, SEMI-BLACK,
 BROWN, GREEN WHITE & FOREST GREEN
 CUSTOM COLOURS AVAILABLE UPON REQUEST

AVAILABLE GATE HEIGHTS:



991mm (39")
 1295mm (51")
 1600mm (63") SHOWN
 1905mm (75")

FITTINGS


POST COLLAR c/w
 1/2"x3" HINGE BOLT




GATE FINGER
 1" x 1"



GATE COLLAR
 1" x 1"




GATE LATCH
 2" x 2"




SELF CLOSER
 OPTIONAL

SECTION A-A

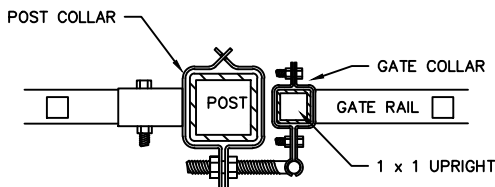

SECTION B-B



COMMENTS: SINGLE SWING GATE



TITLE

**IRON EAGLE I ALUMINUM SERIES
 STYLE 2600 SINGLE SWING GATE**

DRAWING No.

A2600-SG

CHK'D

DATE: JAN 12, 2018